



TREE CARE LINE OF PRODUCTS

TCO STAND FIRM, BE STRONG.

NON-CONTRACTUAL PHOTO. ACTUAL PRODUCT MAY VARY FROM THE ONE SHOWN.


ARTICULATING OVERCENTER AERIAL DEVICE

GENERAL SPECIFICATIONS

EQUIPMENT	TCO60+10E
Working height	75.1 ft / 22,8 m
Ground to bottom of the platform	70.2 ft / 21,0 m
Maximum reach from centerline of rotation	47.0 ft / 14,3 m
Maximum reach upper boom non overcenter	45.0 ft / 13,7 m
Stowed travel height	12.5 ft / 3,8 m
Platform capacity	400 lb / 182 kg
Platform dimensions	24 x 24 x 42 in / 610 x 610 x 1067 mm
Lower boom articulation	0° to 125°
Upper boom articulation	0° to 270°
Rotation	360° continuous infinite

REACH DIAGRAM

TCO60+10E

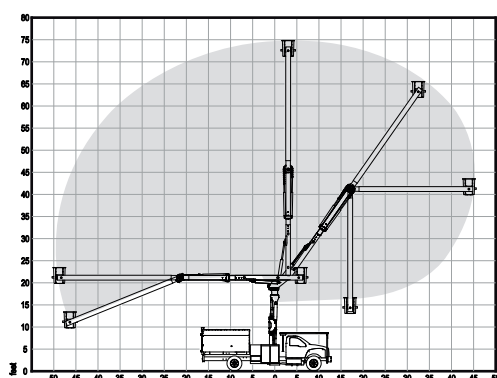

STANDARD FEATURES

- Emergency stop valves at the upper and lower control stations.
- Lower controls with override to the platform.
- 4 function single hand control (Joystick).
- Automatic Platform Leveling System.
- Hydraulic oil level and thermometer.
- Articulating pins with self-lubricating bushing.
- "A" frame outriggers.
- Interlock System for Booms & Outriggers.
- Outrigger motion alarm.
- Hoses fully embedded inside booms.
- Holding valves integrated in hydraulic cylinders.
- Insulated 46 kV Category C.
- Chassis Insulating System (Lower Boom).
- Liner.
- Hydraulic tool circuit at platform.
- Engine Start/Stop at platform.
- Auxiliary emergency pump.
- Manual platform tilt.
- Full size chip box provides excellent payload capacity.
- Maintenance free elbow.
- Vynil platform.
- Back up alarm.
- No required major scheduled maintenance.
- AXIONLIFT meets or exceeds ANSI A92.2 standards.

SERVICE AND PARTS SUPPORT

833-34-FLY-AX (35929) / support@axionlift.com

Manned by expert in-house & mobile technicians, specializing in inspections, repairs & preventative maintenance.