



## TL MASTER EVERY SPACE

NON-CONTRACTUAL PHOTO. ACTUAL PRODUCT MAY VARY FROM THE ONE SHOWN.


## TELESCOPIC ARTICULATING AERIAL DEVICES

### GENERAL SPECIFICATIONS

| EQUIPMENT                                     | TL30                                  |
|-----------------------------------------------|---------------------------------------|
| Working height <sup>1</sup>                   | 35.0 ft / 10,7 m                      |
| Ground to bottom of the platform <sup>1</sup> | 29.8 ft / 9,05 m                      |
| Maximum side reach                            | 23.5 ft / 7,1 m                       |
| Stowed travel height <sup>1</sup>             | 10.4 ft / 3,1 m                       |
| Telescopic boom extension                     | 116 in / 2,9 m                        |
| Platform capacity <sup>2/3</sup>              | 400 lb - 450 lb / 182 kg - 204 kg     |
| Platform dimensions                           | 24 x 24 x 42 in / 610 x 610 x 1070 mm |
| Rotation                                      | 360° continuous infinite              |

### REACH DIAGRAM

#### TL30

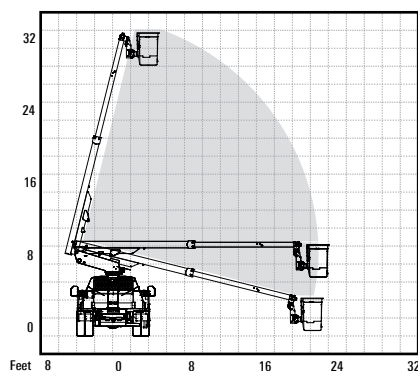

### STANDARD FEATURES

- Emergency stop valves at the upper and lower control stations
- End-Mount platform
- Lower controls with override to the platform
- 3 Function Single Hand Control
- Automatic Hydraulic Platform Leveling System
- Gear box + slewing drive rotation
- Hydraulic oil level and thermometer
- Self-lubricating bushing
- Leveling system and hoses fully embedded inside booms
- Holding valves integrated in hydraulic cylinders
- Insulated 46 kV Category C
- Non-Insulated<sup>4</sup>
- Liner
- Capacity: 400 lb / 450 lb (182 kg / 204 kg)
- Hydraulic tool circuit at platform
- Bucket rotator 180°
- Engine Start/Stop at platform
- Electric emergency pump at platform
- Hydraulic bucket tilt
- Quick coupling for working pressure measurement
- Vynil platform
- Mounting brackets & stationary set-ups
- AXIONLIFT meets or exceeds ANSI A92.2 standards

### OPTIONS

- Front Outrigger with Interlock System
- Front & Rear Outrigger with Interlock System

1. Based on a chassis frame height of 1016 mm (40 in). 2. According to vehicle's GVW. 3. Recommended single platform. 4. According to version.

### SERVICE AND PARTS SUPPORT

**833-34-FLY-AX (35929) / support@axionlift.com**

Manned by expert in-house & mobile technicians, specializing in inspections, repairs & preventative maintenance.