AxionLift

AT

AERIAL LIFTS



AT LEADING SIDE REACH

NON-CONTRACTUAL PHOTO. ACTUAL PRODUCT MAY VARY FROM THE ONE SHOWN.

NTEA THE WORK TRUCK ASSOCIATION

AEM Association of Equipment Manufacturers

YouTube

833-34FLYAX

axionlift.com

AxionLift

AT
AERIAL LIFTS


TELESCOPIC ARTICULATING AERIAL DEVICES

GENERAL SPECIFICATIONS


EQUIPMENT	AT40	AT37
Working height [1]	45.0 ft / 13,7 m	42.0 ft / 12,8 m
Ground to bottom of the platform [1]	40.0 ft / 12,2 m	37.0 ft / 11,3 m
Maximum side reach	28.5 ft / 8,7 m	28.5 ft / 8,7 m
Stowed travel height [1]	9.8 ft / 3,0 m	9.8 ft / 3,0 m
Telescopic boom extension	116 in / 2,9 m	116 in / 2,9 m
Platform capacity [2/3]	400 lb - 450 lb / 182 kg - 204 kg	400 lb - 450 lb / 182 kg - 204 kg
Platform dimmensions	24 x 30 x 42 in / 610 x 762 x 1070 mm	24 x 30 x 42 in / 610 x 762 x 1070 mm
Rotation	360º continuous infinite	360º continuous infinite

REACH DIAGRAM

AT**40**

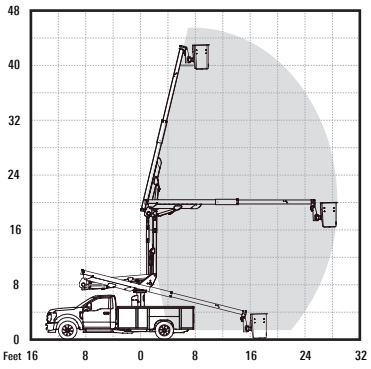

AT**37**

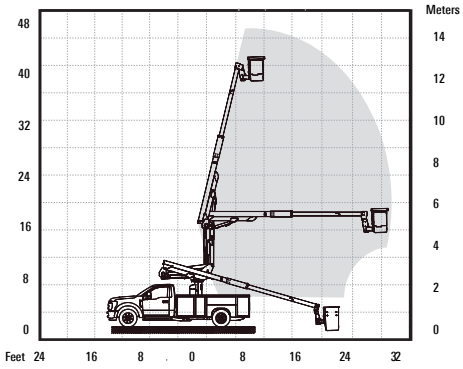

STANDARD FEATURES

- Emergency stop valves at the upper and lower control stations
- End-Mount platform
- Lower controls with override to the platform
- 4 Function Single Hand Control
- Automatic Hydraulic Platform Leveling System
- Gear box + slewing drive rotation
- Hydraulic oil level and thermometer
- Self-lubricating bushing
- Leveling system and hoses fully embedded inside booms
- Holding valves integrated in hydraulic cylinders
- Insulated 46 kV Category C Chassis Insulating System (Lower Boom)
- Liner
- Capacity: 400 lb / 450 lb (182 kg / 204 kg)
- Hydraulic tool circuit at platform
- Bucket rotator 180°
- Engine Start/Stop at platform
- Electric emergency pump at platform
- Hydraulic bucket tilt
- Quick coupling for working pressure measurement
- Vynil platform and insert cover
- Mounting brackets & stationary set-ups
- AXIONLIFT meets or exceeds ANSI A92.2 standards

OPTIONS

- Front Outrigger with Interlock System
- Front & Rear Outrigger with Interlock System

1. Based on a chassis frame height of 1016 mm (40 in). 2. According to vehicle's GVW. 3. Recommended single platform.

SERVICE AND PARTS SUPPORT

833-34-FLY-AX (35929) / support@axionlift.com

Manned by expert in-house & mobile technicians, specializing in inspections, repairs & preventative maintenance.

AXIONLIFT reserves the right to make improvements. Material and specifications are subject to change without notice.
AXION logo are registered trademarks of AXIONLIFT North America LLC and various other countries anda may not be used without permission.